

DEADEND STOCKING

Model No. : CW64-D


This DEADEND STOCKING is used to strongly grasp the conductor for temporary connecting conductor to wire without damage of conductor when stringing works for overhead conductors.

FEATURES

1. Gripping power is increased as much as tensility is increased.
2. Easy connection with conductor.
3. To get more safety gripping power, Bending with 2~3 steel wire on mesh is better.



LAY-OUT

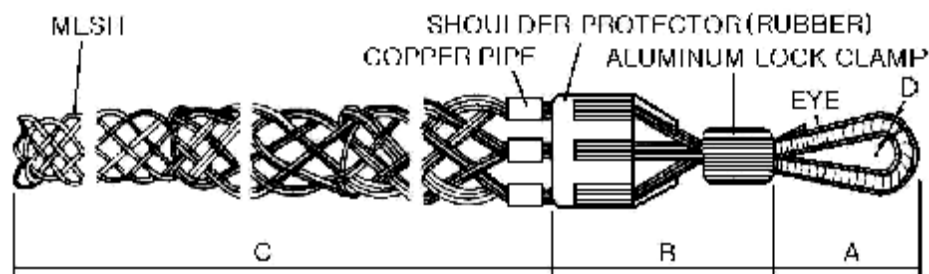

SPECIFICATION

Model No.	Dimensions(mm)				Applicable dia. (mm)	Applicable conductor dia. (ACSR,mm ²)	Working load(kgf)	Weight (kg)
	A	B	C	D				
CW64-D1	100	100	750	12.6	6-9	- 60	1,000	1
CW64-D2	110	100	800	14	10-12	50-90	2,000	1.2
CW64-D3	110	110	800	13	12-18	80-160	3,000	1.5
CW64-D4	110	125	1200	14.5	19-25	170-330	4,000	2
CW64-D5	160	160	1450	18	26-32	410-520	5,000	3
CW64-D6	160	170	1600	19	33-39	610-680	6,000	4
CW64-D7	190	190	1700	20	40~46	TACSR 810~910	7,000	4.5
CW64-D8	260	250	1900	22	47-54	TACSR Upto 1,000	8,000	5

- Length of "C" can be bigger on request.