

EARTHING ROLLER (3ROLLER- SPRING TYPE)

Model No. : CW53


This EARTHING ROLLER is specially designed for protecting workers from electric shock by exist high voltage cable when they are working for overhead conductors or OPGW using with insulated equipment, roller, tensioner etc.



FEATURES

1. It's consist of 3 aluminum wheels, 1 spring and 1 roll wire to reach ground.
2. The aluminum wheels are quite smoothly rolling by using high quality bearing.
3. This earthing roller is used by setting at front of engine puller or tensioner.
4. To make better connecting with conductor, The spring should be high tensility.
5. The conductor can be passing through between the wheels.

LAY- OUT

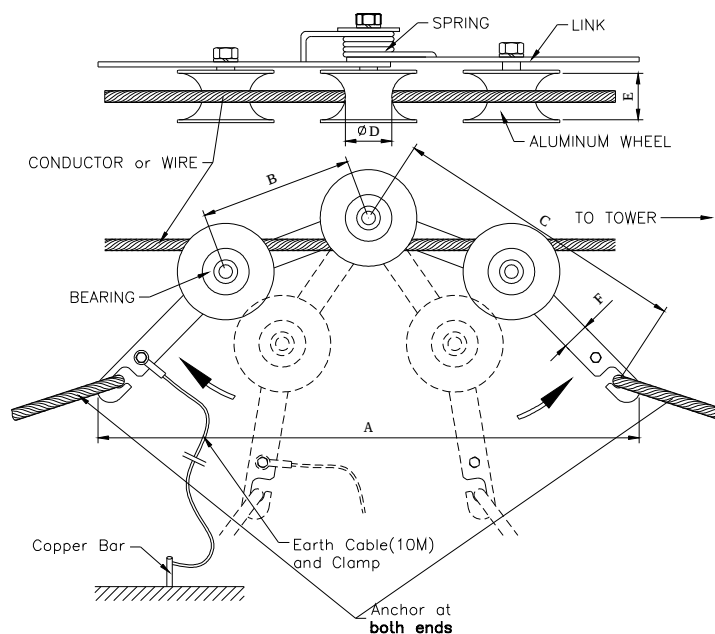

SPECIFICATION

MODEL No.	Dimensions(mm)						Max. conductor dia.	Electricity	Sizes (LxWxH)mm	Weight (kg)
	A	B	C	D	E	F				
CW53 - A	750	190	370	65	55	50	ACSR 810sq	100A	750x320x140	7
CW53 - B	640	180	352	55	55	32	OPGW 300sq	100A	640x275x130	5