


STRINGING CLAMP

Model No. : CW121

This STRINGING CLAMP is clamped at the end of ACSR conductor, and applicable weight is under 40% of tensility for stringing work, and safety rate is 3 times, and also usable for uncoated conductors. Such as copper wire or steel wire etc.



LAY-OUT

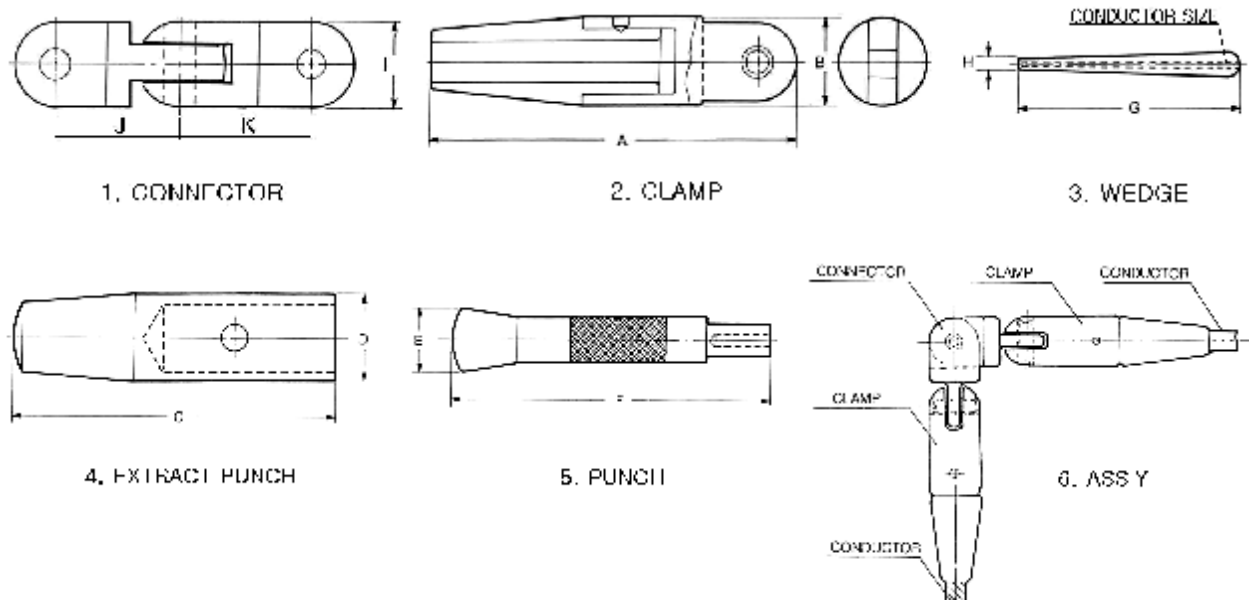

SPECIFICATION

Model No.	Max. conductor dia. (mm ²) ACSR, TACSR	Clamp		Extract punch		Punch		Wedge		Connector		
		A	B	C	D	E	F	G	H	I	J	K
CW121-3	80,100	157	38	150	41	30	150	87.5~95	4.5~7	38	52	55
CW121-4	120,160	174	44	150	47	30	150	95~110	4~5.4	44	52	55
CW121-5	200,240	202	50	150	53	30	150	115~120	4.5~6.2	50	67	69
CW121-6	300,410	218	56	150	59	30	150	140	5.2~6.2	56	67	69
CW121-7	520,610	227	64	150	65	30	150	140	5.2~6.4	64	78	77
CW121-8	810	231	70	150	70	30	150	140	7	70	80	75
CW121-10	1160	299	90	150	90	30	150	151.5	7	90	102	105

- Extract punch and punch are option.