


STRINGING BLOCK

This STRINGING BLOCK handling on steel tower is essential equipment to assist safety and speedy stringing work by smoothly passing of the conductor when stringing works for overhead conductor. The Wheel was made of aluminum alloy, and the wheel will be optionally supplied in coating with various coating materials on the wheel groove for preventing damage of the conductor, and also ball bearings in the wheel makes wheel turning smooth.

Ordering inform for coating material on the wheel groove.


- | | |
|---------------------------------|-------------------|
| 1. NEOPRENE COATING(OPTION) | Model No. with/N |
| 2. POLYURETHANE COATING(OPTION) | Model No. with/P |
| 3. NBR COATING(OPTION) | Model No. with/NR |
| 4. No coating : Model no. only. | |

SINGLE STRINGING BLOCK

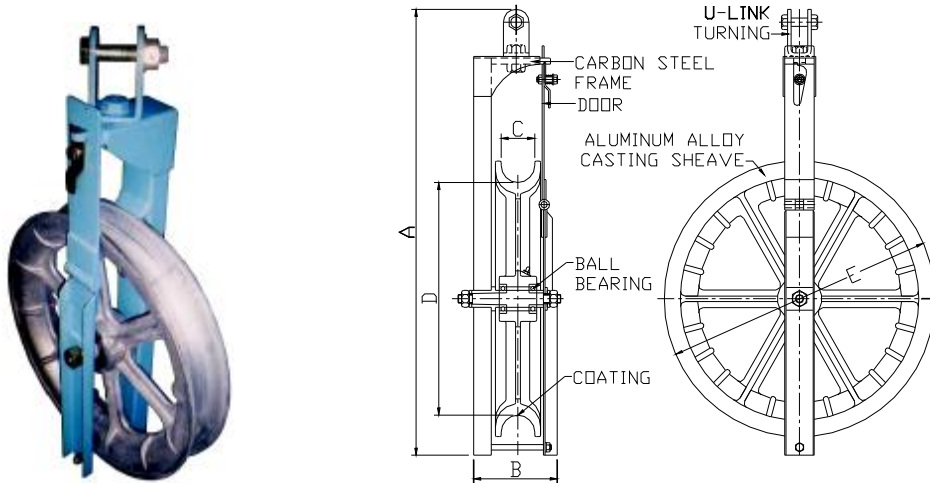


Model No.	Indicated dia.	Dimensions(mm)					Working load(kgf)	Weight (kg)
		A	B	C	D	E		
CW16-B	Φ1600	2,030	310	150	1,600	1,780	12,000	150
CW16-E	Φ1000	1,450	300	120	1,000	1,150	10,000	120
CW16-1	Φ600	1,100	200	34	600	685	5,000	34
CW16-2	Φ450	892	178	26	450	550	4,000	26
CW16-3	Φ300	700	142.5	16	300	372	3,000	16
CW16-4	Φ600	1,190	205.	42	600	720	5,000	42

DOUBLE STRINGING BLOCK

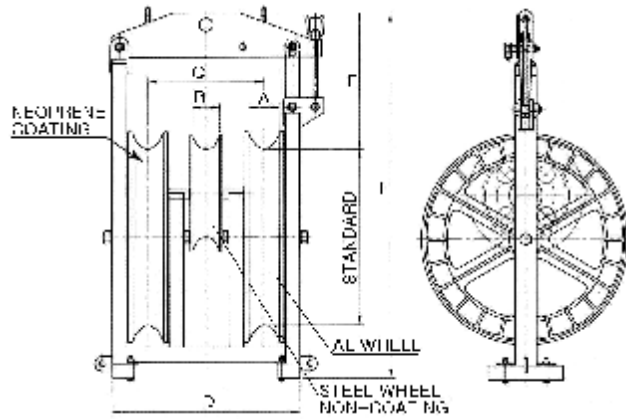


Model No.	Indicated dia.	Dimensions(mm)						Working load(kgf)	Weight (kg)
		A	B		D	E	F		
CW12-1	Φ450	90	70	85	680	580	1,100	3,000x2	85
CW12-2	Φ600	90	70	102	720	580	1,160	4,000x2	102

TRIPLE STRINGING BLOCK

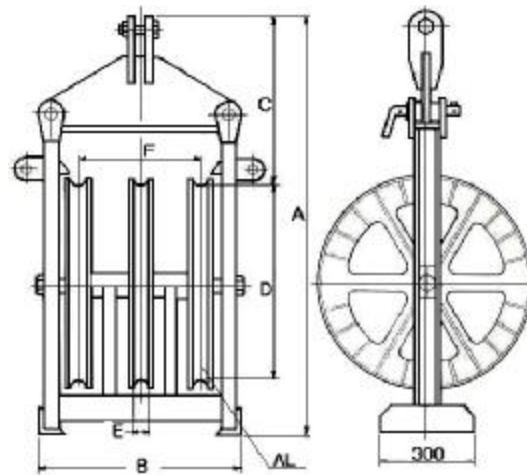


Model No.	Indicated dia.	Dimensions(mm)						Working load(kgf)	Weight (kg)
		A	B	C	D	E	F		
CW41-1	Φ450	1,250	492	580	462	74	300	3,000x3	85
CW41-2	Φ600	1,400	562	580	615	90	340	4,000x3	100
CW41-3	Φ800	1,600	570	580	815	100	340	4,000x3	145

4 WHEEL STRINGING BLOCK

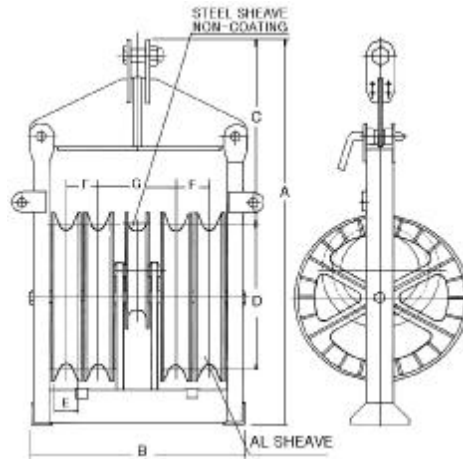

Model No.	Indicated dia.	Dimensions(mm)							Working load(kgf)	Weight (kg)
		A	B	C	D	E	F	G		
CW94-1	Φ600	1,400	882	580	615	95	130	340	4,000x4	155
CW94-2	Φ800	1,600	910	580	815	100	140	360	4,000x4	236

5 WHEEL STRINGING BLOCK

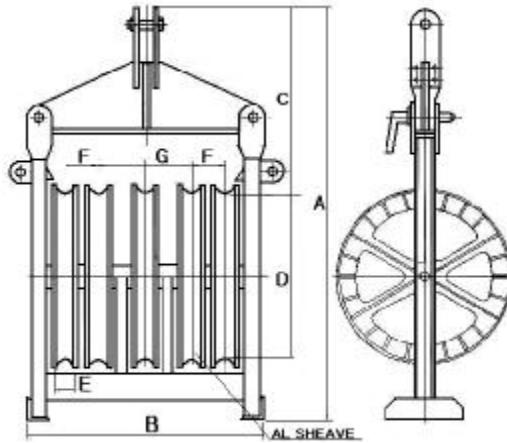

Model No.	Indicated dia.	Dimensions(mm)							Working load(kgf)	Weight (kg)
		A	B	C	D	E	F	G		
CW93-1	Φ600	1,400	882	580	615	95	130	340	4,000x5	150
CW93-2	Φ800	1,600	910	580	815	100	140	360	4,000x5	230

OPGW STRINGING BLOCK


This STRINGING BLOCK for OPGW is essential equipment to assist stringing works for OPGW by hanging on the steel tower.

FEATURES

1. Strongly produced for the conductor can be passing through well.
2. Light weight for easy take on and take off.
3. Bearing inside of wheel for smooth turning of the wheel.



LAY-OUT

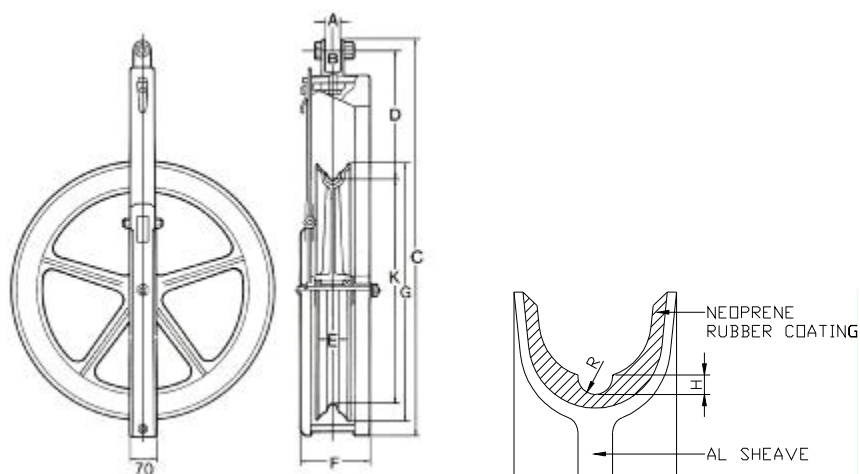

SPECIFICATION

1. Sheave material : Aluminum
2. Neoprene rubber coating on wheel groove.
3. Ball bearing inside of wheel.
4. Galvanized or painted steel frame

Model No.	Indicated dia.	Dimensions(mm)										Applicable conductor (mm)	Working load(kgf)	Weight (kg)
		A	B	C	D	E	F	G	H	K	R			
CW92-1	Φ450	28	20	814	273	65	136	535	20	450	6.5	Φ11.4-13	3,000	16
CW92-2	Φ450	32	30	907	342	75	143	546	22.5	450	9.7	Φ13.1-19.4	4,000	22
CW92-3	Φ600	32	30	1065	342	80	149	726	28	600	12.3	Φ19.5-24.5	4,000	30