

SUPPORTING ROLLER – 1 WHEEL

Model No. : MY3200


This SUPPORTING ROLLER is a wheel block to replace old g/w with new conductor or OPGW in no loosen and vibration of the conductor by the roller placed or kevlar rope with 10~15M interval when stringing works for overhead conductors or OPGW working by supporting roller system.



FEATURES

1. Easily workable without any influence by direction of the wind.
2. The frame was made of stainless steel for no rusty.
3. The structure was made to easy connecting with guide rope.
4. The corner edge was made with round to prevent damage for conductor or OPGW.
5. This roller is used together with stopper.
6. For preventing induction from steel tower, The roller made of aluminum acceptable

LAY-OUT

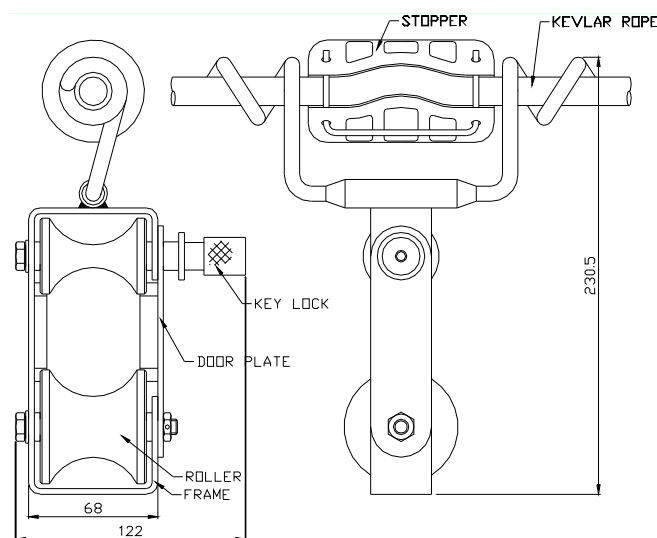

SPECIFICATION

Model No.	MY3200	MY3200A
Type	1 ROLL	
Max. conductor dia.	46 mm	
Working load	200 kgf	
Frame material	Stainless	
Roller material	Polyacetal	Aluminum
Dimensions(LxWxH)	230x120x142 mm	
Weight	1.3 kg	1.4 kg