

SUPPORTING ROLLER – 2 WHEEL

Model No. : CW3236


This SUPPORTING ROLLER is a wheel block with two wheels block to replace old g/w with new conductor or OPGW in no loosen and vibration of the conductor by the roller placed or kevlar rope with 10~15M interval when stringing works for overhead conductors or OPGW working by supporting roller system.

FEATURES

1. Easily workable without any influence by direction of the wind.
2. Door plate and key lock in one touch system makes easy take-on and take-off of conductor or OPGW.
3. The frame was made of stainless steel for no rusty.
4. More safety working is possible than single roller (Model No:MY3200)
5. For preventing induction from steel tower, The roller made of aluminum acceptable



LAY - OUT

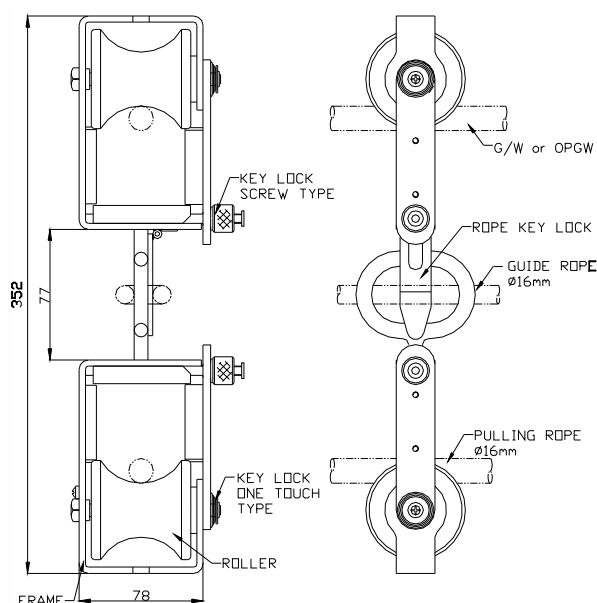

SPECIFICATION

Model No.	CW3236	CW3236A
Type	2 ROLL	
Max. conductor dia.	52 mm	
Working load	300 kgf	
Frame material	Stainless	
Roller material	Polyacetal	Aluminum
Dimensions(LxWxH)	353x64.4x90 mm	
Weight	2 kg	2.2 kg