

접지봉


Model No. : CW77

본 접지봉은 작업자의 안전을 보장하기 위하여

철탑에서의 이상전류를 접지시켜 줍니다.



LAY-OUT

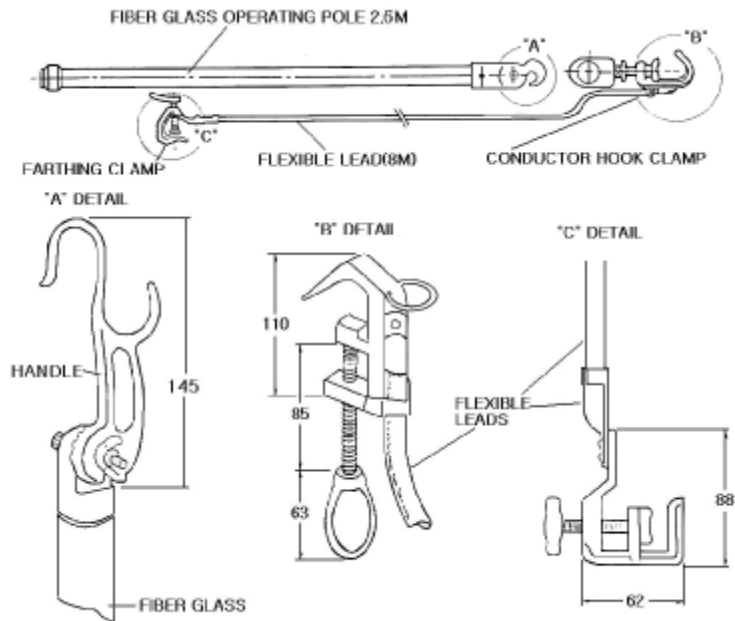

(CW77-B 154KV)

SPECIFICATION

Part name & quantity of 1 set

1. Flexible lead (Copper grounding wire) : 3 rolls with clamp 2 type
2. Fiber glass pole : 1~3 pole with handle

Model No.	Voltage	Flexible lead	Fiber glass pole
CW77-A	Max. 33~66 kv	14 mm ² x3 m	1.3 m (1pole)
CW77-B	Max. 154 kv	22 mm ² x4 m	2.6 m (2pole)
CW77-C	Max. 345 kv	38 mm ² x6 m	5.2 m (3pole)