

RECOVER MACHINE (HYDRAULIC TYPE)

Model No. : C353


This RECOVER MACHINE is designed for using to recover the guide rope when stringing works for OPGW or overhead conductors by CHUNGWOO'S JOGEUMCHA working system has finished, and especially it can be help to prevent collision by JOGEUMCHA placed on guide rope. As well as it makes the guide rope tighten to prevent touching with conductor. This tool is connected to the end of guide rope that is placed on the new OPGW, and being recovered with serving as brake as when the guide rope draw back by winch.



FEATURES

1. Brake power can be 8 times more than spring type.
2. The brake control can be easy and wider by pressure of clamping shaft.
3. High quality rubber roller can be long life.
4. High density hydraulic oil in the gear box makes no change of brake power by heat.
5. Middle sleeve is not applicable.

LAY-OUT

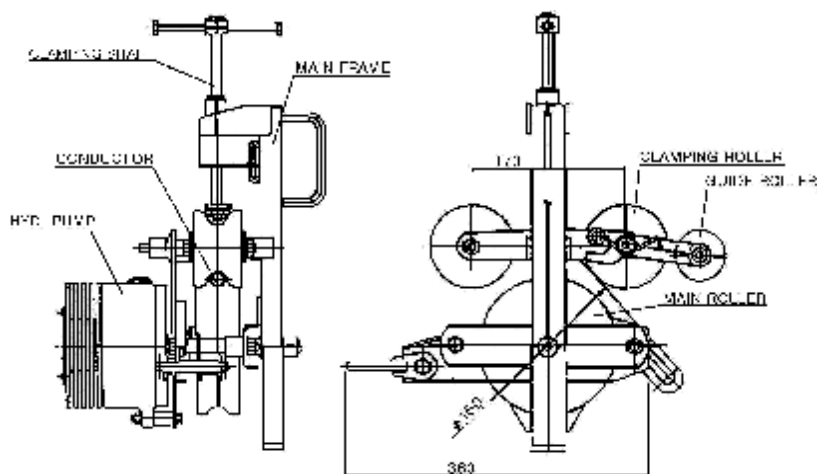

SPECIFICATION

Type		Hydraulic pressure control
Range (without limit)	Conductor dia.	Ø10 ~ Ø70 mm
	ACSR	Min. 58 mm ²
	OPGW	Min. 58 mm ²
Brake force (Horizontally)	At 60mm ² OPGW	20 Kgf ~ 50 Kgf / set
	At 170mm ² ~290mm ² OPGW	30 Kgf ~ 70 Kgf / set
Weight		Approx 12 kg